


438 Stitcher

In Line Stitching with the New GBR 438 Stitcher

438 Stitcher

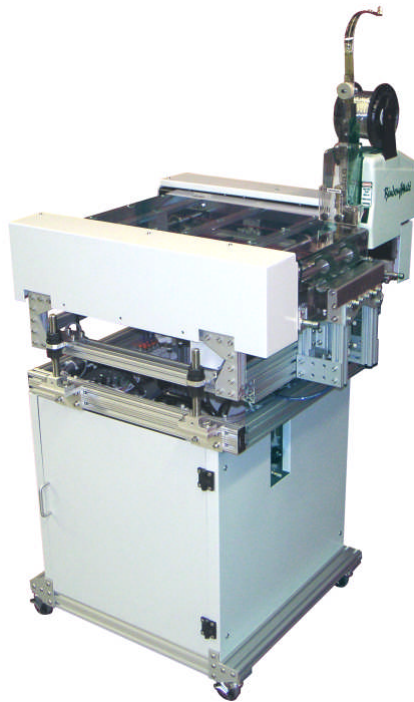

- Stitches from right or left side; from top or bottom
- 1,500 sheet loader capacity
- Up to 40,000 sheets per hour



Managing the World's Paper Flow™

438 Stitcher Specifications

The **438 Stitcher** is a standalone stitcher that interfaces with the 438 cutter, cutter/folder, feeder and feeder/folder products.

It accumulates (over or under) and corner stitches (from above or below) from 2 to 25 sheets of 20lb. flat sheets from 6.0" X 6.0" to 11.75" X 14". Throughput is package size dependent.

With GBR's sub-setting software, multiple intermixed stitched and unstitched sets can be deposited into the same track section of several different brands of inserters.

Applications to date include policy assembly and cross-folded product documentation.



GBR 438 Stitcher Fold System

BASIC SPECIFICATIONS:

SPEED:

Up to 40,000 Sheets Per Hour

PAPER SUPPLY:

Min/Max Paper Size: 5.5"W x 5.5"L
11.75"W x 11.75"L

Paper Weight: 20-24 lb. Bond (80-90gsm)
Other Weights on Request

Total Paper Capacity (Loader): 1,500 sheets

STITCHING SPECIFICATIONS:

Number of Stitchers: 1 Maximum with Fixed Location
Location of Stitches: Left or Right Side from Top or Bottom

Orientation of Stitches: Vertical in the Paper Travel Direction

Accumulator/Stitcher Min/Max: 2-25 Sheets 20-24 lb.

POWER SOURCE:

208/220VAC 1-Phase, 50/60Hz
208/380VAC 3-Phase, 50/60Hz

SYSTEM WEIGHT:

Approximately 1,000 lbs.

READ SYSTEMS:

Line Code Read System (OMR)
Industry Standard Barcodes: 3 of 9, 128, and 2 of 5 Interleaved
2-D Barcode – DataMatrix; OCR/2-D Barcode

OTHER FEATURES:

Inserter Interface: Bell & Howell, Buhrs, EMC, KAS, Kirk Rudy, & Mailcrafter
Folder Interface (GBR 438)

800-833-6167 / 860-526-9561 / Fax: 860-526-2747
Internet: www.gbr.com / e-mail: sales@gbr.com
Managing the World's Paper Flow™

GBR Systems Corporation is a subsidiary of Mathias Bauerle GmbH

